



1/5

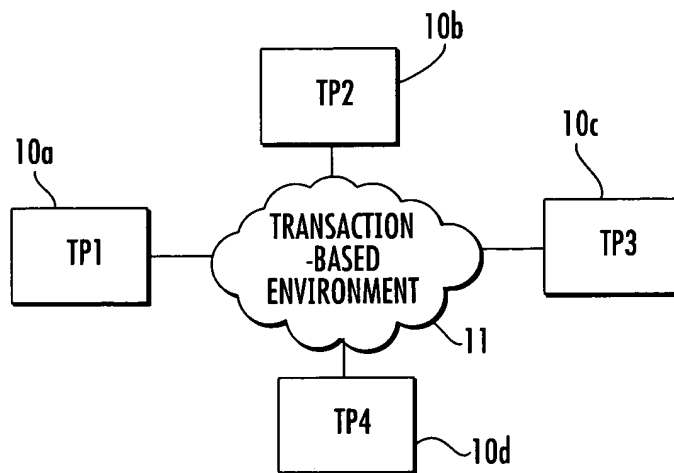


FIG. 1

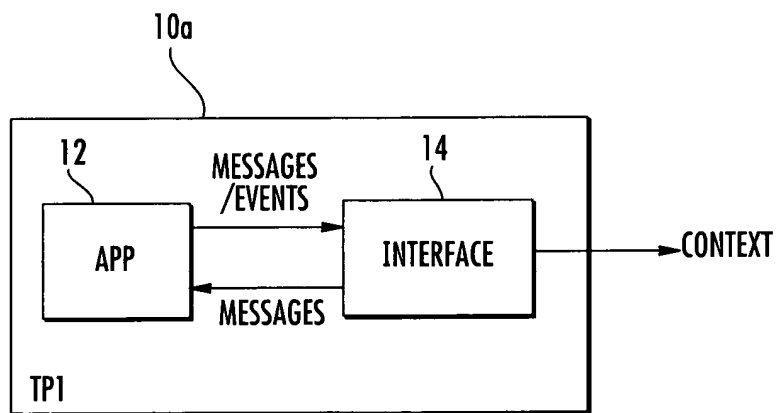


FIG. 2

2/5

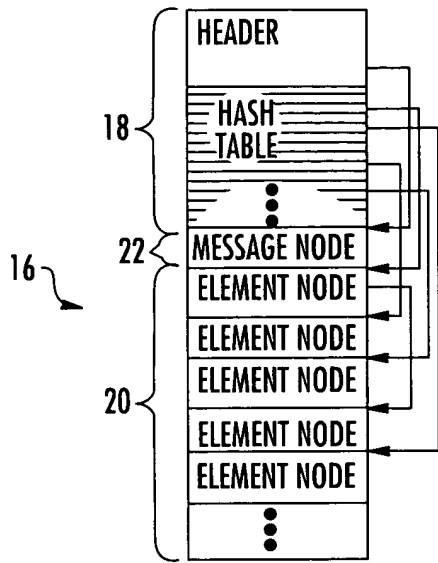


FIG. 3

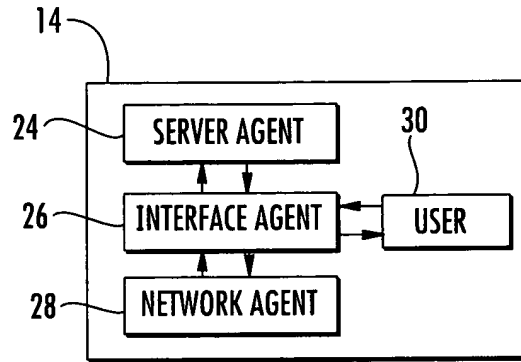


FIG. 4

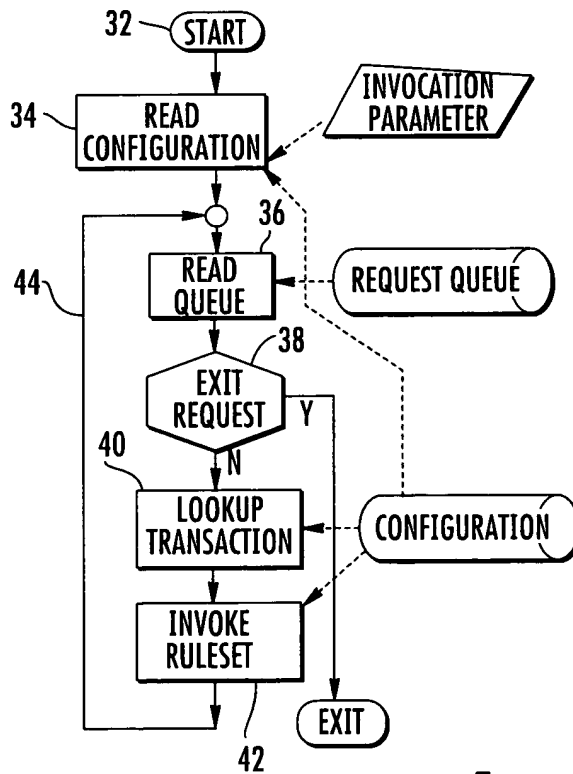


FIG. 5

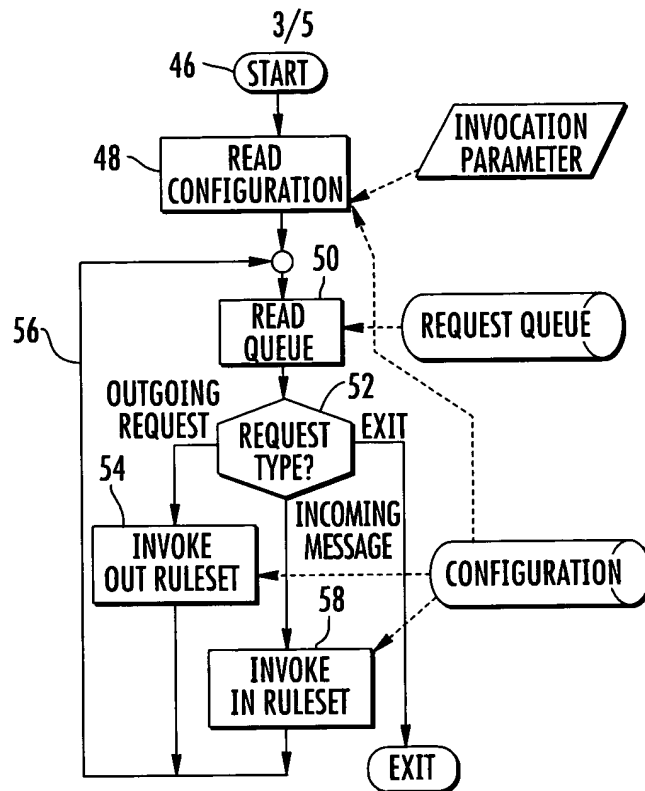


FIG. 6

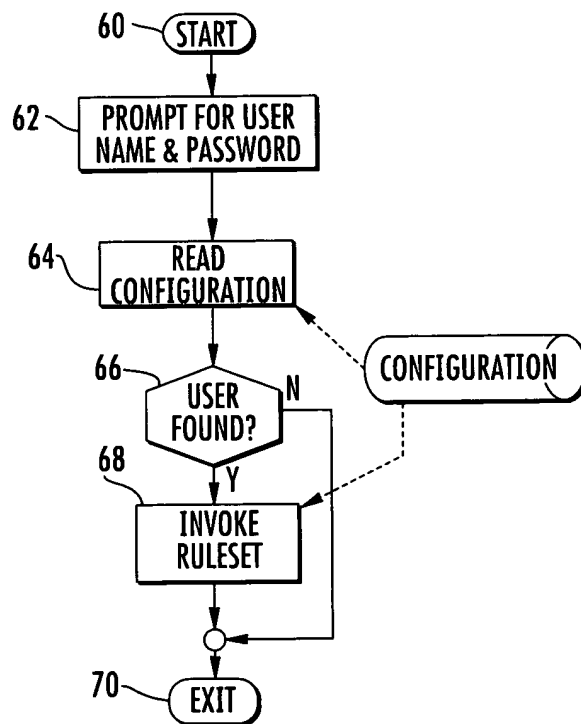


FIG. 7

4/5

SYNAPSE CONFIGURATION

ENVIRONMENT sol

LoginLogoutOptions

SYSTEM CONFIGURATION

DATA DEFINITION

SYSTEM TOPOLOGY

SYSTEMS

TRANSACTION SERVICES

TRANSACTIONS

INTERFACES

MESSAGES

NETWORKS

PROTOCOLS

DEVICE CONFIGURATION

APPLICATION PRESENTATION

USER CONFIGURATION

RULE MANAGEMENT

INTERFACES LIST

01-dlf-ifc  
01-dye-ifc  
main\_ifc  
tcpip\_ncr3400\_ifc  
tcpip\_ncr\_old\_ifc  
tcpip\_transponder\_ifc  
test ab ifc

OBJECT ATTRIBUTES

TYPE  
NAME  
OBJECT ID  
VERSION  
SYSTEM  
OUTGOING MESSAGE SELECTION  
INCOMING MESSAGE SELECTION  
QUEUE  
NETWORK  
NETWORK

ATTRIBUTES VALUE

Interface  
main\_ifc  
4e000001  
1  
main\_system  
out\_select  
in\_select  
<memory>  
05\_dc\_rf  
05\_dc\_xbar

Refers to

Rule Set: "in\_select"

Rule Set: "out\_select"

System: "main\_select"

Referenced by

System: "main\_select"

Network: "05\_dc\_xbar"

Device: "05\_dc\_tm\_C"

Network: "05\_dc\_rf"

Device: "05\_dc\_rf\_C"

Device: "05\_dc\_rf\_D"

Device: "05\_dc\_rf\_E"

Device: "05\_dc\_rf\_F"

Device: "05\_dc\_rf\_G"

Device: "05\_dc\_rf\_H"

Device: "05\_dc\_rf\_I"

CONNECTED AND LOGGED IN

FIG. 8

